



SOLITRONICS ENGINEERING LTD.

2202, Perfect Industrial Bldg. 31, Tai Yau St. San Po Kong Kowloon Hong Kong

TEL : (852) 2730-8145

FAX : (852) 2730-3245

E-mail : info@solitronics.com

Ø16mm LED Pilot Light

Date:

13th Nov. 2009

Group:

SE-16D


Part Number:

SE-16D-PL-FX-X-XX

Data Sheet:

SE-16D-PL

IEC-60947 GB-14048.5 IP40 (IP65 with Seal Cap)



18x24mm Pictorial Section View




18x24mm Form-1




18x18mm Form-2




Ø18mm Form-3











Drilling Plan for Form-1

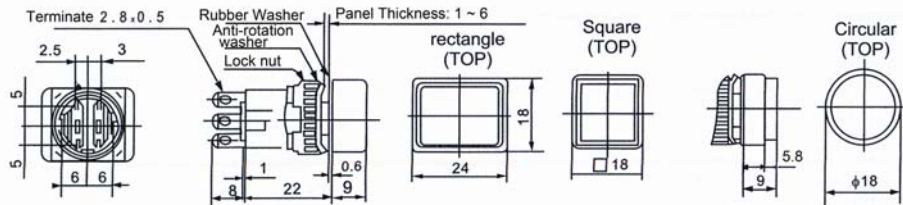

Drilling Plan for Form-2&3



Product	Style	Type	Color	Lamp Voltage	Outline Dimensions (mm)
18x24mm Pilot Light	 Form-1	SE-16D-PL-F1	R=Red G=Green Y=Yellow B=Blue W=White K=Black	00=No Lamp 21=6V AC/DC 22=12V AC/DC 23=24V AC/DC 26=110V AC/DC 28=220V DC only 31=220V AC only	    
18x18mm Pilot Light	 Form-2	SE-16D-PL-F2			
18mmØ Pilot Light	 Form-3	SE-16D-PL-F3			

Ordering Code: SE-16D-PL-FX-X-XX

SE-16D-PL	-	FX	-	X	-	XX
		F1=18x24mm F2=18x18mm F3=Ø18mm		R=Red G=Green Y=Yellow B=Blue W=White K=Black		00=No Lamp 21=6V AC/DC 22=12V AC/DC 23=24V AC/DC 26=110V AC/DC 28=220V DC only 31=220V AC only

Technical Parameters

Environmental Temperature	-25°C ~ +55°C	Electrical Life	AC-15 = 100x10 ³ Times DC-13 = 50x10 ³ Times	Voltage	AC-15	DC-14
Humidity	45 ~ 85%RH			24V	2.0A	0.7A
Contact Resistance	≤ 50mΩ	Protection Level	IP40 (IP65 with seal cap)	110V	1.0A	0.2A
Insulation Resistance	≥ 100MΩ	Operational Travel	1.5 ~ 2.0mm	220V	0.5A	0.1A
Withstand Voltage	> 200VAC					

Note: Due to continuous development all specifications are subject to change without prior notice. Please confirm all details at time of ordering.