



SOLITRONICS ENGINEERING LTD.

2202, Perfect Ind. Bldg, 31 Tai Yau St, San Po Kong, Kowloon, Hong Kong S.A.R., China

TEL : (852) 2730-8145

FAX : (852) 2730-3245

E-mail : info@solitronics.com

IEC Ø22mm Position-Indicating LED Pilot-Lights (Symbol Pilot-Light with Red & Green LED Light-Source)

Date:

11th Sep 2015

Group:

Part Number: (16 Digits)

Data Sheet:

Ø22mm LED Pilot-Lights

SE-22D-PI-FAX-XX

SE-IND-22D-S6-1-PI

For 24V, 36V, 48V, 110V, 130V AC/DC; 230V DC, 230V AC & 380V AC only

Body-colour: Black

Body-colour: Black

Body-colour: Black



Form-FA1


Form-FA2

Form-FA3

Switch-Position Indicator

Breaker-Position Indicator

Grounding-Position Indicator

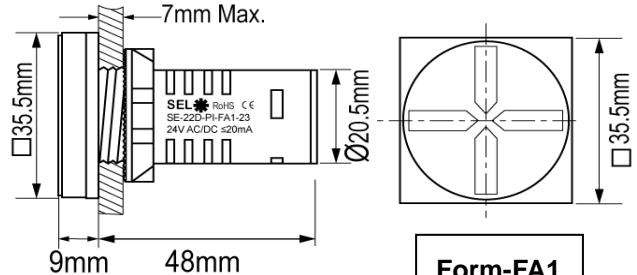

Outline Dimension



IP65

Solitronics Part-No.	Nominal Rated- Voltage	Current	Function	Features	Remarks
SE-22D-PI-FA1-23	24V AC/DC	≤ 20mA	Switch Position Indicator (Form-FA1)	With three finger-proof screw-terminals with wire-protector (Marked: X0, X1 & X2) X0=Common X0X2=Green Horizontal-bar <input type="checkbox"/> lighted X0X1= Red Vertical-bar <input type="checkbox"/> lighted	
SE-22D-PI-FA1-24	36V AC/DC				
SE-22D-PI-FA1-25	48V AC/DC				
SE-22D-PI-FA1-26	110V AC/DC				
SE-22D-PI-FA1-27	130V AC/DC				
SE-22D-PI-FA1-28	230V DC only				
SE-22D-PI-FA1-31	230V AC only				
SE-22D-PI-FA1-32	380V AC only				
SE-22D-PI-FA2-23	24V AC/DC	≤ 20mA	Circuit-Breaker Position Indicator (Form-FA2)	With three finger-proof screw-terminals with wire-protector (Marked: X0, X1 & X2) X0=Common X0X1= Red Icon lighted X0X2= Green Icon lighted	
SE-22D-PI-FA2-24	36V AC/DC				
SE-22D-PI-FA2-25	48V AC/DC				
SE-22D-PI-FA2-26	110V AC/DC				
SE-22D-PI-FA2-27	130V AC/DC				
SE-22D-PI-FA2-28	230V DC only				
SE-22D-PI-FA2-31	230V AC only				
SE-22D-PI-FA2-32	380V AC only				
SE-22D-PI-FA3-23	24V AC/DC	≤ 20mA	Grounding Position Indicator (Form-FA3)	With two finger-proof screw- terminals with wire protector. (Marked: X1 & X2) X1X2= Red Icon lighted	
SE-22D-PI-FA3-24	36V AC/DC				
SE-22D-PI-FA3-25	48V AC/DC				
SE-22D-PI-FA3-26	110V AC/DC				
SE-22D-PI-FA3-27	130V AC/DC				
SE-22D-PI-FA3-28	230V DC only				
SE-22D-PI-FA3-31	230V AC only				
SE-22D-PI-FA3-32	380V AC only				

Remarks:

All IEC Ø22mm Position-Indicating LED Pilot-Lights are supplied with Black-Colour Body and with three or two finger-proof screw-terminals with wire-protector. Due to continuous development all specifications are subject to change without prior notice. Please confirm all details at time of ordering. Special anti-electric-field and/or anti-surge types for use in cabinets with capacitor-banks are available on request. Round-shape Position Indicators are also available. Please contact info@solitronics.com for information. Packing: 10pcs per Inner-box; 500pcs per Export Carton; G.W: 16.0Kg; Export Carton Measurement: 42x35x35cm



SOLITRONICS ENGINEERING LTD.

2202, Perfect Ind. Bldg, 31 Tai Yau St, San Po Kong, Kowloon, Hong Kong S.A.R., China

TEL : (852) 2730-8145

FAX : (852) 2730-3245

E-mail : info@solitronics.com

IEC Ø22mm Position-Indicating LED Pilot-Lights (Symbol Pilot-Light with Red & Green LED Light-Source)

Date:

20th Jan 2016

Group:

Ø22mm LED Pilot-Lights

Part Number: (16 Digits)

SE-22D-PI-FBX-XX

Data Sheet:

SE-IND-22D-S6-2-PI

For 24V, 36V, 48V, 110V, 130V AC/DC; 230V DC, 230V AC & 380V AC only

Body-colour: Black

Body-colour: Black

Body-colour: Black



Form-FB1



Form-FB2




Form-FB3

Switch-Position
Indicator

Breaker-Position
Indicator

Grounding-Position
Indicator

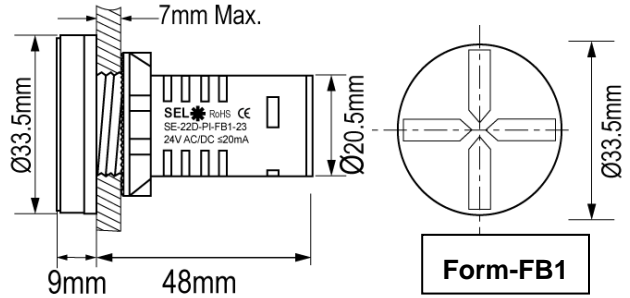

Outline Dimension



IP65

Solitronics Part-No.	Nominal Rated- Voltage	Current	Function	Features	Remarks
SE-22D-PI-FB1-23	24V AC/DC	≤ 20mA	Switch Position Indicator (Form-FB1)	With three finger-proof screw-terminals with wire-protector (Marked: X0, X1 & X2) X0=Common X0X2=Green Horizontal-bar <input type="checkbox"/> lighted X0X1= Red Vertical-bar <input type="checkbox"/> lighted	
SE-22D-PI-FB1-24	36V AC/DC				
SE-22D-PI-FB1-25	48V AC/DC				
SE-22D-PI-FB1-26	110V AC/DC				
SE-22D-PI-FB1-27	130V AC/DC				
SE-22D-PI-FB1-28	230V DC only				
SE-22D-PI-FB1-31	230V AC only				
SE-22D-PI-FB1-32	380V AC only				
SE-22D-PI-FB2-23	24V AC/DC	≤ 20mA	Circuit-Breaker Position Indicator (Form-FB2)	With three finger-proof screw-terminals with wire-protector (Marked: X0, X1 & X2) X0=Common X0X1= Red Icon lighted X0X2= Green Icon lighted	
SE-22D-PI-FB2-24	36V AC/DC				
SE-22D-PI-FB2-25	48V AC/DC				
SE-22D-PI-FB2-26	110V AC/DC				
SE-22D-PI-FB2-27	130V AC/DC				
SE-22D-PI-FB2-28	230V DC only				
SE-22D-PI-FB2-31	230V AC only				
SE-22D-PI-FB2-32	380V AC only				
SE-22D-PI-FB3-23	24V AC/DC	≤ 20mA	Grounding Position Indicator (Form-FB3)	With two finger-proof screw- terminals with wire protector. (Marked: X1 & X2) X1X2= Red Icon lighted	
SE-22D-PI-FB3-24	36V AC/DC				
SE-22D-PI-FB3-25	48V AC/DC				
SE-22D-PI-FB3-26	110V AC/DC				
SE-22D-PI-FB3-27	130V AC/DC				
SE-22D-PI-FB3-28	230V DC only				
SE-22D-PI-FB3-31	230V AC only				
SE-22D-PI-FB3-32	380V AC only				

Remarks:

All IEC Ø22mm Position-Indicating LED Pilot-Lights are supplied with Black-Colour Body and with three or two finger-proof screw-terminals with wire-protector. Due to continuous development all specifications are subject to change without prior notice. Please confirm all details at time of ordering. Special anti-electric-field and/or anti-surge types for use in cabinets with capacitor-banks are available on request. Round-shape Position Indicators are also available. Please contact info@solitronics.com for information. Packing: 10pcs per Inner-box; 500pcs per Export Carton; G.W: 16.0Kg; Export Carton Measurement: 42x35x35cm