



**IEC Ø22mm Pilot-Light with BA9s Socket
Lamp-Bulb Replaceable from Front Panel**
For Incandescent, Neon or LED T-10x25-28mm BA9s Lamp-Bulbs

Date:

25th July 2012

Group:
Ø22mm LED Pilot-Lights

Part Number (10-17-Digits):
SE-22D-Z-XXXV-X-S

Data Sheet:


SE-IND-22D-Z-S9-B9

For 6V to 380V 2 - 3W Max. Incandescent, Neon or LED Bulbs



IP65

Solitronics Engineering Ltd E-mail: info@solitronics.com

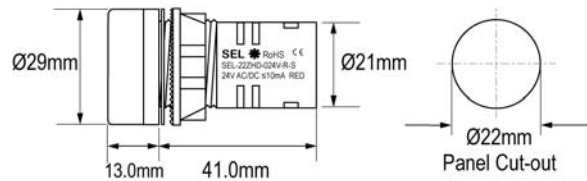

Features & Application

- Low-cost Robust IEC Ø22mm re-lampable Pilot-Lights for General Application.
- Fitted with BA9S Socket with Lamp-Bulb replaceable from Front of Panel.
- Can be supplied with or without T-10x25mm BA9s Multi-chip LED Lamp-Bulb.
- Choice of six lens colors Red, Green, Amber, Yellow, Blue & White, all with diffuser.
- Can also be supplied with T-10x25-28mm BA9s Incandescent, Neon or LED lamp-bulbs.
- Maximum Lamp-bulb Wattage 2 to 3W. Bulb-Removal Tool Available on request.

Physical Dimensions

- Mounting-Hole: Ø22.0mm (Locked-mounting on holes with 20.3mm flats).
- Overall-Length: 54.5mm -0/+2mm; Depth-behind-panel: 41.0mm -0/+1.5mm; Lens-Diameter: Ø29.5mm Maximum.
- Termination: Finger-proof screw-terminals with screw-retainer and wire-protector.
- Standard-Packing: 10 pcs per inner box; 500 pcs per Export-Carton; Carton-Size: 42x35x35cm (LxBxH); G.W. approx. 14.5Kg

**SE 22D-Z Series
BA9S Pilot-Light
RoHS compliant**

Solitronics Part No.	Rated Voltage	Typical-Current & Max. Lamp-Wattage	No. of chips Typical	Lens Colour / LED-Colour	Remarks
SE-22D-Z-R	Per Bulb Rating	2 - 3W Max.	N. A.	Red Lens	Bulb not Fitted
SE-22D-Z-G	Per Bulb Rating	2 - 3W Max.	N. A.	Green Lens	Bulb not Fitted
SE-22D-Z-A	Per Bulb Rating	2 - 3W Max.	N. A.	Amber Lens	Bulb not Fitted
SE-22D-Z-Y	Per Bulb Rating	2 - 3W Max.	N. A.	Yellow Lens	Bulb not Fitted
SE-22D-Z-B	Per Bulb Rating	2 - 3W Max.	N. A.	Blue Lens	Bulb not Fitted
SE-22D-Z-W	Per Bulb Rating	2 - 3W Max.	N. A.	White Lens	Bulb not Fitted
SE-22D-Z-024V-R-S	24V AC/DC	≤ 10mA	2 - 4 chips	Super-Bright Red (625nm)	With LED Bulb
SE-22D-Z-024V-G-S	24V AC/DC	≤ 10mA	2 - 4 chips	Super-Bright Green (517nm)	With LED Bulb
SE-22D-Z-024V-A-S	24V AC/DC	≤ 10mA	2 - 4 chips	Super-Bright Amber (605nm)	With LED Bulb
SE-22D-Z-024V-Y-S	24V AC/DC	≤ 10mA	2 - 4 chips	Super-Bright Yellow (587nm)	With LED Bulb
SE-22D-Z-024V-B-S	24V AC/DC	≤ 10mA	2 - 4 chips	Super-Bright White (x:0.281 y:0.289)	With LED Bulb
SE-22D-Z-024V-W-S	24V AC/DC	≤ 10mA	2 - 4 chips	Super-Bright Blue (461nm)	With LED Bulb
SE-22D-Z-130V-R-S	130V AC/DC	≤ 5.0mA	2 - 4 chips	Super-Bright Red (625nm)	With LED Bulb
SE-22D-Z-130V-G-S	130V AC/DC	≤ 5.0mA	2 - 4 chips	Super-Bright Green (517nm)	With LED Bulb
SE-22D-Z-130V-A-S	130V AC/DC	≤ 5.0mA	2 - 4 chips	Super-Bright Amber (605nm)	With LED Bulb
SE-22D-Z-130V-Y-S	130V AC/DC	≤ 5.0mA	2 - 4 chips	Super-Bright Yellow (587nm)	With LED Bulb
SE-22D-Z-130V-B-S	130V AC/DC	≤ 5.0mA	2 - 4 chips	Super-Bright Blue (461nm)	With LED Bulb
SE-22D-Z-130V-W-S	130V AC/DC	≤ 5.0mA	2 - 4 chips	Super-Bright White (x:0.281 y:0.289)	With LED Bulb
SE-22D-Z-230V-R-S	230V AC only	≤ 3.0mA	2 - 4 chips	Super-Bright Red (625nm)	With LED Bulb
SE-22D-Z-230V-G-S	230V AC only	≤ 3.0mA	2 - 4 chips	Super-Bright Green (517nm)	With LED Bulb
SE-22D-Z-230V-A-S	230V AC only	≤ 3.0mA	2 - 4 chips	Super-Bright Amber (605nm)	With LED Bulb
SE-22D-Z-230V-Y-S	230V AC only	≤ 3.0mA	2 - 4 chips	Super-Bright Yellow (587nm)	With LED Bulb
SE-22D-Z-230V-B-S	230V AC only	≤ 3.0mA	2 - 4 chips	Super-Bright Blue (461nm)	With LED Bulb
SE-22D-Z-230V-W-S	230V AC only	≤ 3.0mA	2 - 4 chips	Super-Bright White (x:0.281 y:0.289)	With LED Bulb

Remarks:

1. Due to continuous development, all specifications are subject to change without prior notice. If required, please confirm all details at time of ordering.
2. Price of T-10x25mm Multi-chip LED BA9S, T-10x28mm BA9s Neon & T-10x28mm BA9S 6V to 230V 2W-2.6W Filament lamp- bulbs on request.