



Solitronics T-1-1/4 Bi-Pin SB Neon lamp

SEL P/N: NE410SB-4613BP-2330

For 230V/330K/0.50mA 50K Hrs

Date (Ausgabe): 10-11-2006

T-1-1/4 Bi-Pin with 4x10 SB Neon lamp (With 0.50Øx6mm Pins and with Lead-spacing = 2.54mm)


Glimmlampen Signalfarbe

T-1-1/4 Bi-Pin

Important:

Lamp must be used with external series-resistor.

For 230V AC, use 330K 5% 1/4W DIN-207 series-resistor.

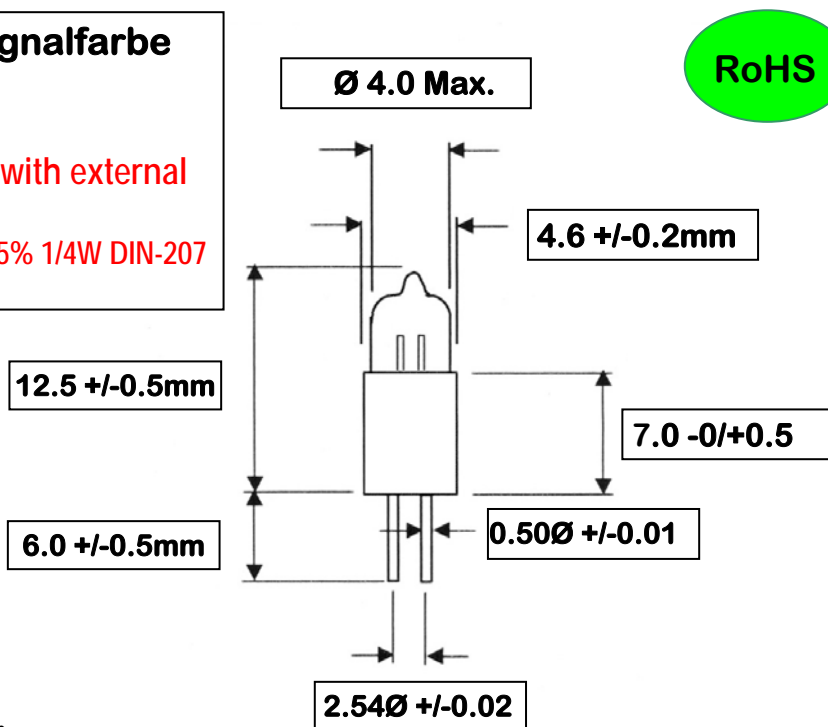

Note: All dimensions are in mm

Standard-Brightness Baureihe normal

SOLITRONICS Part Number:	Supply Voltage/Series-Resistor/Current Nenn spannung/Vor-widerstand/Nennstrom	Strike- Voltage	Life-Hrs Lebensdauer (Mittel)
NE410SB-4613BP-2330	115V/150K/0.50mA 230V/330K/0.50mA	≤65V	50K Hrs+

Description:

4x10mm Standard Brightness Bi-Pin Neon Lamp with 0.5Øx6.0mm Pins Pin-Spacing: 2.54mm
For 115V AC 50/60Hz and 230V 50/60Hz application with operating current of 0.35-0.55mA

Remarks:

Typical performance: 230V/330K/0.50mA 50K Hrs.+

Index

Solitronics Engineering Ltd 1515, Star House, Kowloon Hong Kong

Drawing No. SEL-NE410SB-4613BP-2330

E-mail: info@solitronics.com