



SOLITRONICS ENGINEERING LTD.

2202, Perfect Industrial Bldg. 31, Tai Yau St. San Po Kong Kowloon Hong Kong

TEL : (852) 2730-8145
 FAX : (852) 2730-3245
 E-mail : info@solitronics.com

Ø16mm LED Selector Switches


Date:
13th Nov. 2009

Group:
SE-16D

Part Number:
SE-16D-SSXX-NX-FX-X-XX

Data Sheet:
SE-16D-SS

IEC-60947 GB-14048.5 IP40



18x24mm Pictorial Section View




18x24mm Form-1




18x18mm Form-2






Ø18mm Form-3



Drilling Plan for Form-1



Drilling Plan for Form-2&3

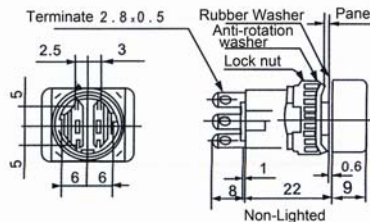

Product	Style	Working Manner	Contact	Type	Color	Lamp Voltage	Outline Dimensions (mm)
18x24mm Selector Button	Form-1	 2-pos. maintained 90°	11	SE-16D-SS11-N2-F1	Non-Lighted R=Red G=Green K=Black	00=No Lamp	 Non-Lighted Lighted
			22	SE-16D-SS22-N2-F1			
		 3-pos. maintained 45°	11	Not Available			
			22	SE-16D-SS22-N3-F1			
18x18mm Selector Button	Form-2	 2-pos. maintained 90°	11	SE-16D-SS11-N2-F2			
			22	SE-16D-SS22-N2-F2			
		 3-pos. maintained 45°	11	Not Available			
			22	SE-16D-SS22-N3-F2			
Ø18mm Selector Button	Form-3	 2-pos. maintained 90°	11	SE-16D-SS11-N2-F3			
			22	SE-16D-SS22-N2-F3			
		 3-pos. maintained 45°	11	Not Available			
			22	SE-16D-SS22-N3-F3			

Ordering Code (16-digits): SE-16D-SSXX-NX-FX-X-XX

SE-16D-SS **XX** - **NX** - **FX** - **X** - **XX**

11=1NO+1NC
 22=2NO+2NC

N2=Non-Lighted 2-Pos. Maintained
 N3=Non-Lighted 3-Pos. Maintained

F1=18x24mm
 F2=18x18mm
 F3=Ø18mm

R=Red
 G=Green
 K=Black

00=No Lamp

Note:
 3-position Selector-switches are available with 2NO+2NC only

Technical Parameters

Environmental Temperature	-25°C ~ +55°C	Electrical Life	AC-15 = 100x10 ³ Times	Voltage	AC-15	DC-14
Humidity	45 ~ 85%RH		DC-13 = 50x10 ³ Times			
Contact Resistance	≤ 50mΩ	Protection Level	IP40 (IP65 with seal cap)	110V	1.0A	0.2A
Insulation Resistance	≥ 100MΩ	Operational Travel	1.5 ~ 2.0mm	220V	0.5A	0.1A
Withstand Voltage	> 200VAC					

Note: Due to continuous development all specifications are subject to change without prior notice. Please confirm all technical & other details at time of ordering.