



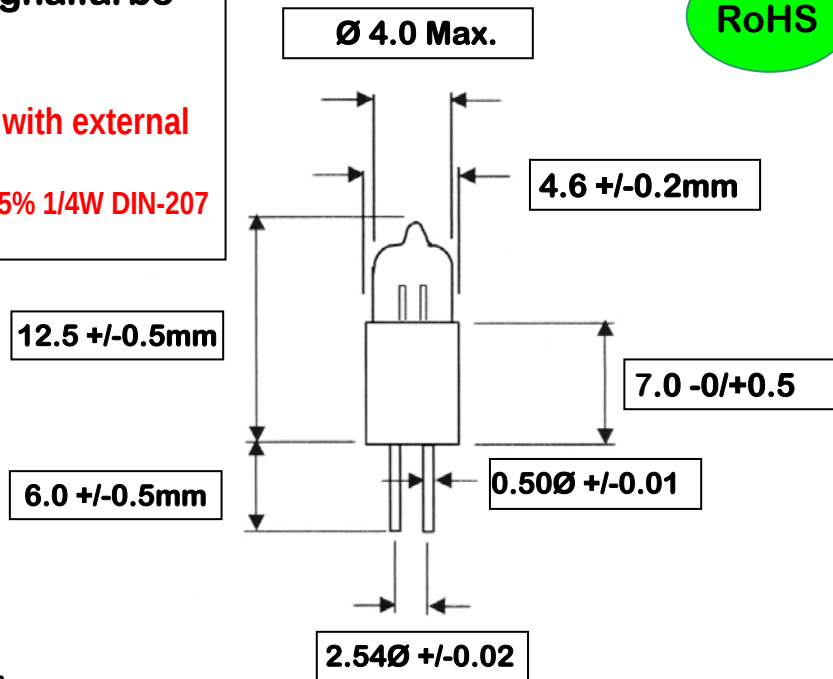
Solitronics T-1-1/4 Bi-Pin HB Neon lamp

SEL P/N: NE410HB-4613BP-2100

For 230V/100K/1.70mA 15K Hrs

Date (Ausgabe): 10-11-2006

T-1-1/4 Bi-Pin with 4x10 HB Neon lamp (With 0.50Øx6mm Pins and with Lead-spacing = 2.54mm)

Glimmlampen Signalfarbe
T-1-1/4 Bi-Pin
Important:
Lamp must be used with external series-resistor.
For 230V AC, use 100K 5% 1/4W DIN-207 series-resistor.
RoHS

Note: All dimensions are in mm

High-Brightness Baureihe superhell

SOLITRONICS Part Number:	Supply Voltage/Series-Resistor/Current Nenn spannung/Vor-widerstand/Nennstorm		Strike- Voltage	Life-Hrs Lebensdauer (Mittel)
NE410HB-4613BP-2100	115V/33K/1.70mA	230V/100K/1.70mA	≤95V	15K Hrs+

Description:

4x10mm High Brightness Bi-Pin Neon Lamp with 0.5Øx6.0mm Pins Pin-Spacing: 2.54mm
For 115V AC 50/60Hz and 230V 50/60Hz application with operating current of 1.60-1.80mA

Remarks:	Typical performance: 230V/100K/1.70mA 15K Hrs.
Index	

Solitronics Engineering Ltd 1515, Star House, Kowloon Hong Kong
Drawing No. SEL-NE410HB-4613BP-2100
E-mail: info@solitronics.com